


PO # 1264

December 27, 2012

MAX. DIA. BUOY WATCH CIRCLE = 4.4 N.Miles

Position: 22 46 N, 157 54 W

2.7 m Surlyn Buoy with
 (2) IMET/ARGOS Telemetry,
 5 Laney Radiometers, XEOS GPS
 SBE 39 AT, Lascar At/H
 VAISALA WXT 520
 PCO2, SAMI, SBE 16, Fluorometer

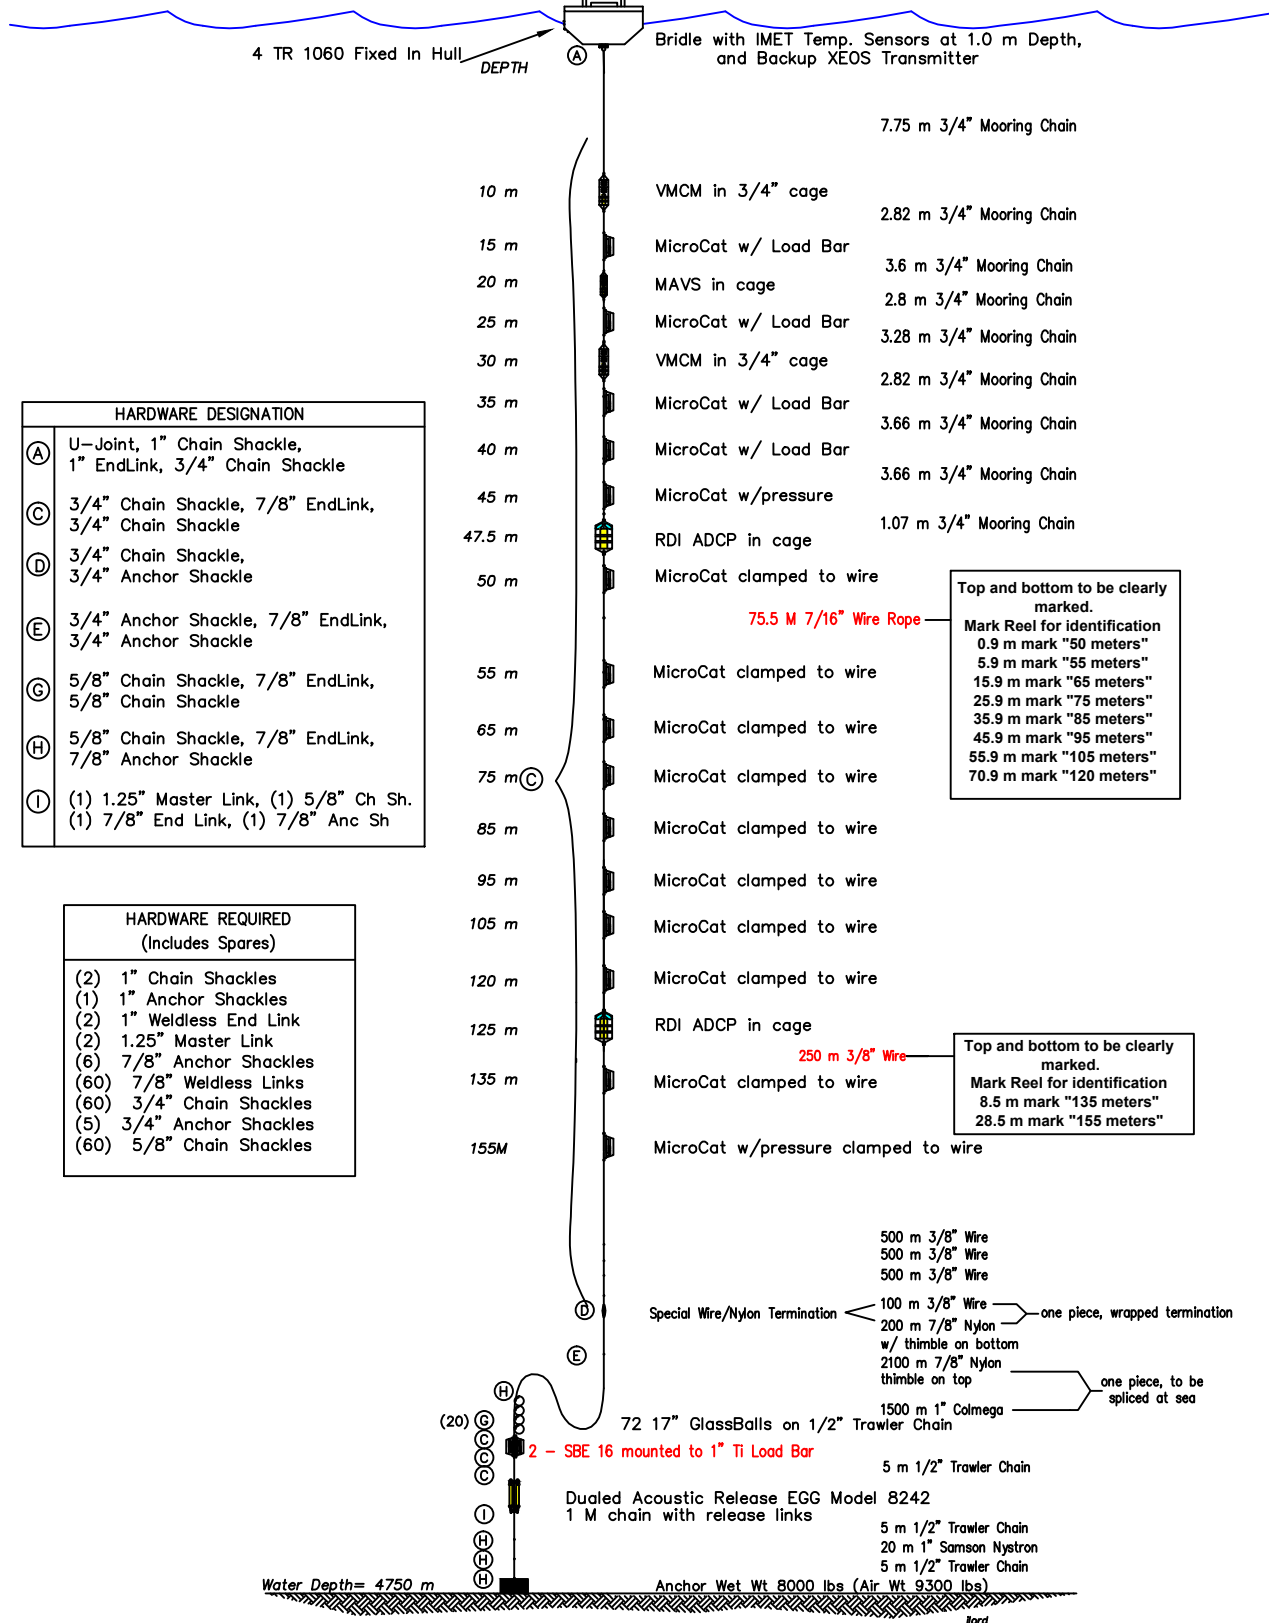

HARDWARE DESIGNATION	
(A)	U-Joint, 1" Chain Shackle, 1" EndLink, 3/4" Chain Shackle
(C)	3/4" Chain Shackle, 7/8" EndLink, 3/4" Chain Shackle
(D)	3/4" Chain Shackle, 3/4" Anchor Shackle
(E)	3/4" Anchor Shackle, 7/8" EndLink, 3/4" Anchor Shackle
(G)	5/8" Chain Shackle, 7/8" EndLink, 5/8" Chain Shackle
(H)	5/8" Chain Shackle, 7/8" EndLink, 7/8" Anchor Shackle
(I)	(1) 1.25" Master Link, (1) 5/8" Ch Sh. (1) 7/8" End Link, (1) 7/8" Anc Sh

HARDWARE REQUIRED (Includes Spares)	
(2)	1" Chain Shackles
(1)	1" Anchor Shackles
(2)	1" Weldless End Link
(2)	1.25" Master Link
(6)	7/8" Anchor Shackles
(60)	7/8" Weldless Links
(60)	3/4" Chain Shackles
(5)	3/4" Anchor Shackles
(60)	5/8" Chain Shackles

500 m 3/8" Wire
 500 m 3/8" Wire
 500 m 3/8" Wire

Special Wire/Nylon Termination

- 100 m 3/8" Wire — one piece, wrapped termination
- 200 m 7/8" Nylon w/ thimble on bottom
- 2100 m 7/8" Nylon thimble on top — one piece, to be spliced at sea
- 1500 m 1" Colmega

72 17" GlassBalls on 1/2" Trawler Chain

2 - SBE 16 mounted to 1" Ti Load Bar

5 m 1/2" Trawler Chain

Dualed Acoustic Release EGG Model 8242
 1 M chain with release links

5 m 1/2" Trawler Chain
 20 m 1" Samson Nyston
 5 m 1/2" Trawler Chain

Water Depth= 4750 m

Anchor Wet Wt 8000 lbs (Air Wt 9300 lbs)

Jord

WHOTS MOORING

10th Deployment - v2