


PO MOORING 1280 WHOTS 13

MAX. DIA. BUOY WATCH CIRCLE = 4.4 N.Miles

Position: 22 40 N, 157 57 W

2.7 m Surlyn Buoy with
(2) IMET/ARGOS Telemetry,
XEOS GPS, SBE 39AT, Lascar At/H
VAISALA WXT 520, SA SWR & HRH
PCO2, SAMI, SBE 16,

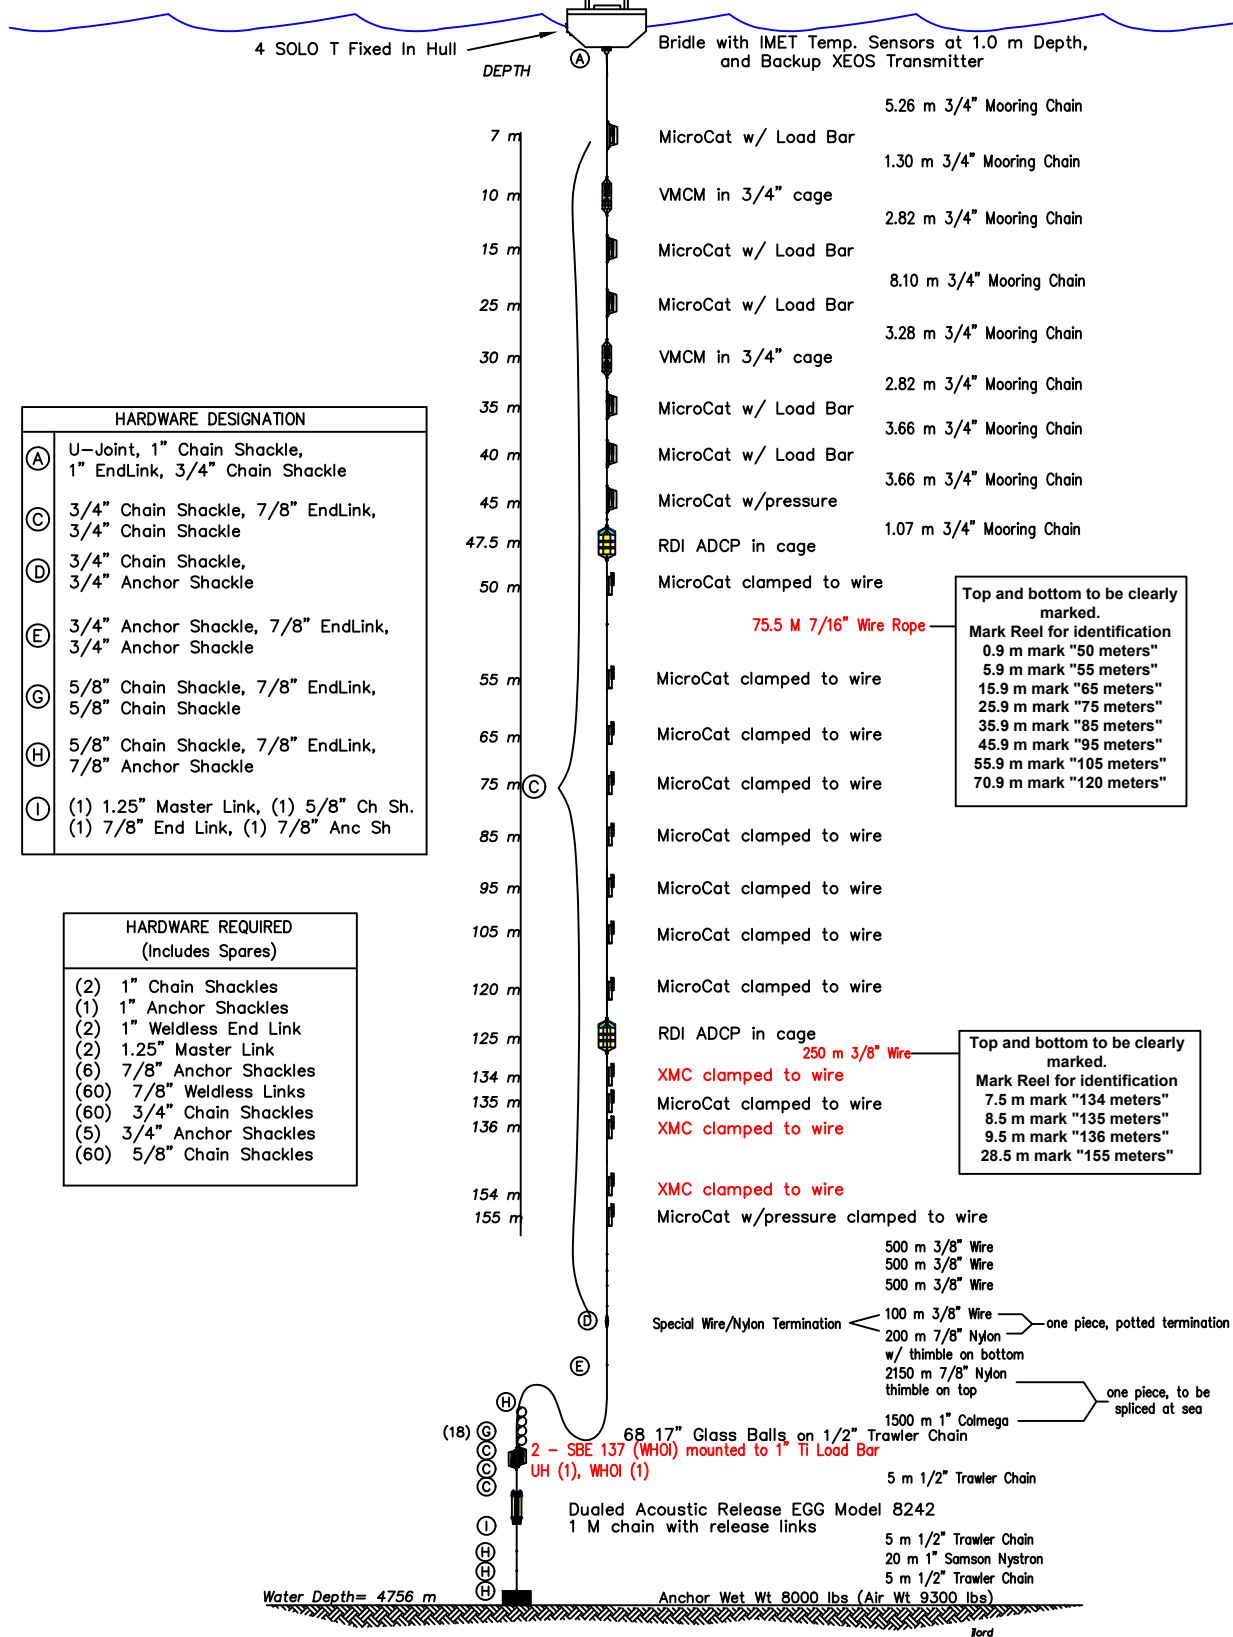

HARDWARE DESIGNATION	
(A)	U-Joint, 1" Chain Shackle, 1" EndLink, 3/4" Chain Shackle
(C)	3/4" Chain Shackle, 7/8" EndLink, 3/4" Chain Shackle
(D)	3/4" Chain Shackle, 3/4" Anchor Shackle
(E)	3/4" Anchor Shackle, 7/8" EndLink, 3/4" Anchor Shackle
(G)	5/8" Chain Shackle, 7/8" EndLink, 5/8" Chain Shackle
(H)	5/8" Chain Shackle, 7/8" EndLink, 7/8" Anchor Shackle
(I)	(1) 1.25" Master Link, (1) 5/8" Ch Sh. (1) 7/8" End Link, (1) 7/8" Anc Sh

HARDWARE REQUIRED (Includes Spares)	
(2)	1" Chain Shackles
(1)	1" Anchor Shackles
(2)	1" Weldless End Link
(2)	1.25" Master Link
(6)	7/8" Anchor Shackles
(60)	7/8" Weldless Links
(60)	3/4" Chain Shackles
(5)	3/4" Anchor Shackles
(60)	5/8" Chain Shackles

Top and bottom to be clearly marked.
Mark Reel for identification
0.9 m mark "50 meters"
5.9 m mark "55 meters"
15.9 m mark "65 meters"
25.9 m mark "75 meters"
35.9 m mark "85 meters"
45.9 m mark "95 meters"
55.9 m mark "105 meters"
70.9 m mark "120 meters"

Top and bottom to be clearly marked.
Mark Reel for identification
7.5 m mark "134 meters"
8.5 m mark "135 meters"
9.5 m mark "136 meters"
28.5 m mark "155 meters"

(18) (G) (C) (C) (C) (I) (H) (H) (H)
2 - SBE 137 (WHOI) mounted to 1" Ti Load Bar
UH (1), WHOI (1)
68 17" Glass Balls on 1/2" Trawler Chain

Dual Acoustic Release EGG Model 8242
1 M chain with release links
5 m 1/2" Trawler Chain
20 m 1" Samson Nylon
5 m 1/2" Trawler Chain
Anchor Wet Wt 8000 lbs (Air Wt 9300 lbs)

WHOTS MOORING 13 Deployment-V2