


WHOTS 21

MAX. DIA. BUOY WATCH CIRCLE = 4.4 N.Miles

Position: Put in later

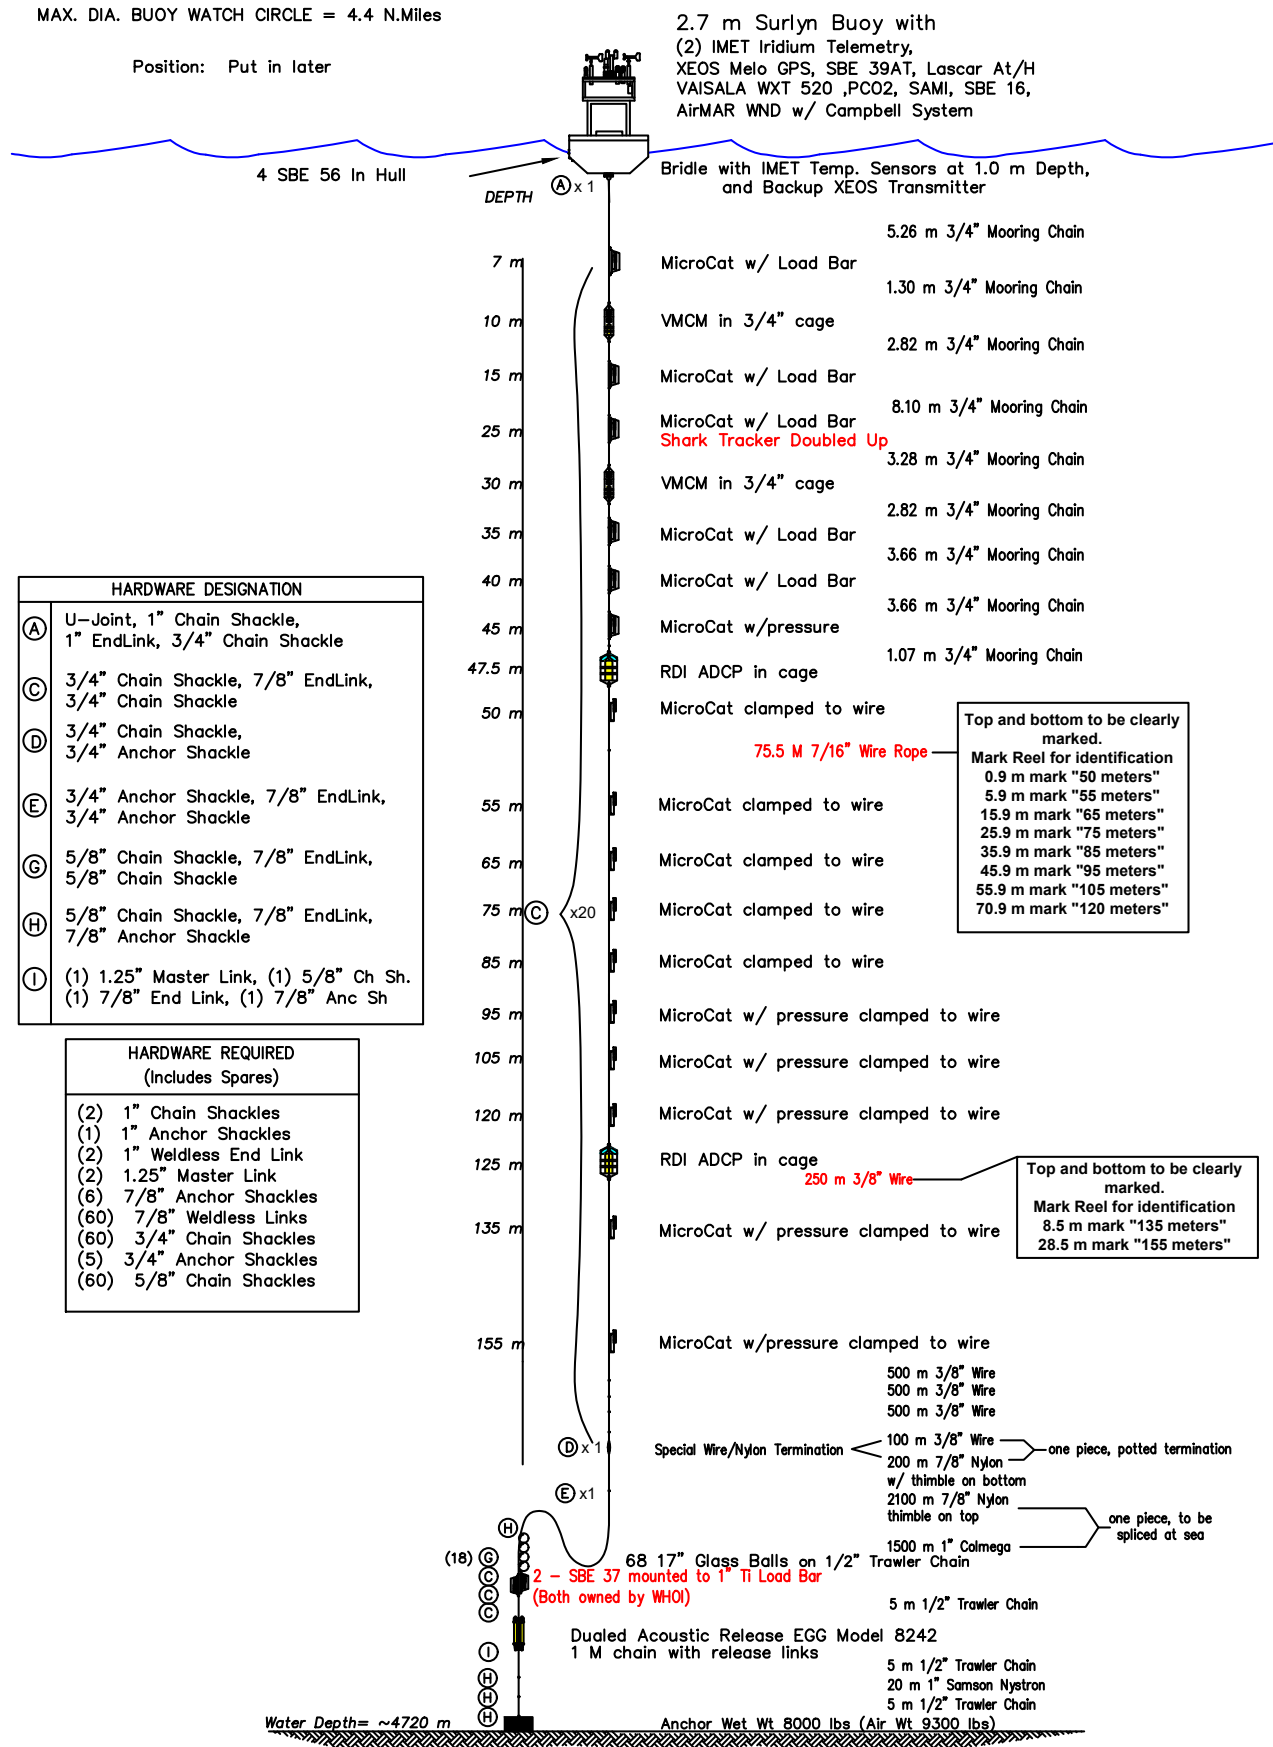

HARDWARE DESIGNATION	
(A)	U-Joint, 1\" Chain Shackle, 1\" EndLink, 3/4\" Chain Shackle
(C)	3/4\" Chain Shackle, 7/8\" EndLink, 3/4\" Chain Shackle
(D)	3/4\" Chain Shackle, 3/4\" Anchor Shackle
(E)	3/4\" Anchor Shackle, 7/8\" EndLink, 3/4\" Anchor Shackle
(G)	5/8\" Chain Shackle, 7/8\" EndLink, 5/8\" Chain Shackle
(H)	5/8\" Chain Shackle, 7/8\" EndLink, 7/8\" Anchor Shackle
(I)	(1) 1.25\" Master Link, (1) 5/8\" Ch Sh. (1) 7/8\" End Link, (1) 7/8\" Anc Sh

HARDWARE REQUIRED (Includes Spares)	
(2)	1\" Chain Shackles
(1)	1\" Anchor Shackles
(2)	1\" Weldless End Link
(2)	1.25\" Master Link
(6)	7/8\" Anchor Shackles
(60)	7/8\" Weldless Links
(60)	3/4\" Chain Shackles
(5)	3/4\" Anchor Shackles
(60)	5/8\" Chain Shackles

Top and bottom to be clearly marked.
Mark Reel for identification
0.9 m mark "50 meters"
5.9 m mark "55 meters"
15.9 m mark "65 meters"
25.9 m mark "75 meters"
35.9 m mark "85 meters"
45.9 m mark "95 meters"
55.9 m mark "105 meters"
70.9 m mark "120 meters"

Top and bottom to be clearly marked.
Mark Reel for identification
8.5 m mark "135 meters"
28.5 m mark "155 meters"

WHOTS MOORING

21st Deployment - v1

RG 03/04/25